




TS555i (Tmax=125C)
 Buck Boost conv. -58V -> +5V
 Voir schema page 4/4

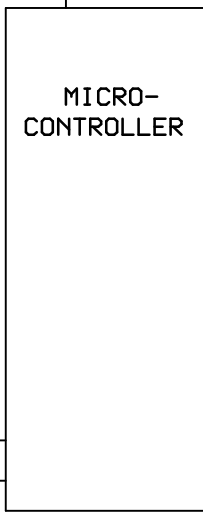

* valeurs entre () = valeurs altern.

5V alim. C12

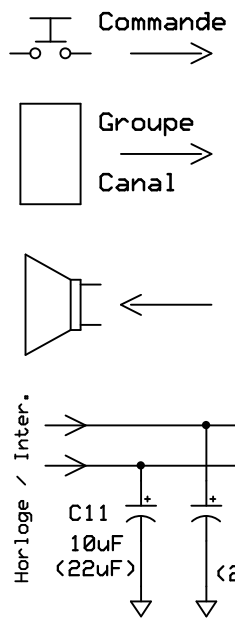

Data IN
 Data OUT
 CLK OUT
 PD

